RENCOVI

4

COMBO FLATBEDS





LODE KING.
IT'S ALL IN THE
DETAILS.



01_ CAMBERED MAIN BEAM

Camber is built into the trailer's main beam to offset beam deflection under load.

02_ ALUMINUM KNEE BRACES

Tubular aluminum knee braces are standard with various spacing options available.

03_ Aluminum Rub Rail

The aluminum rub rail has an outer surface recess to house and protect conspicuity tape.

04_ CROSSMEMBER CONNECTION

Each 4" aluminum crossmember connects to the main beam via a mount. This method of connection transfer the weight of the load directly to the back-bone of the trailer.



LODEKING.COM

FLATBED



Min. 34', Max. 52'6"

DIN		

 LENGTH
 Customer Spec. (Min. 34', Max. 52'6")
 COUPLER HEIGHT
 Customer Spec. (Min. 46", Max. 52")

 WIDTH
 Standard 102" Overall
 KING PIN
 Customer Spec. (Min. 18", Max. 42")

GOOSENECK WEB DEPTH Standard 9 ½"; 7 ½" and 8 ½" Options Available

SUSPENSIONS Tandem Fixed, Tandem with Front or Rear Sliding Axle, Tandem Full Sliding, Tri-Axle Fixed, Tri-Axle Full Sliding, Quad Steerable Ontario SPIF,

West Coast Quad

DROP DECK



Min. 42', Max. 53'

D						

 LENGTH
 Customer Spec. (Min. 42", Max. 52"6")
 COUPLER HEIGHT
 Customer Spec. (Min. 46", Max. 52")

 WIDTH
 Standard 102" Overall
 KING PIN
 Customer Spec. (Min. 18", Max. 42")

 GOOSENECK WEB DEPTH
 Standard 9 ½"; 7 ½" and 8 ½" Options Available
 DECK HEIGHT
 Standard 41", Optional 39 ½", 35", 33 ½"

 SUSPENSIONS
 Tandem Fixed, Tandem with Front or Rear Sliding Axle, Tri-Axle Fixed

B-TRAIN



DIMENSIONS


 LENGTH
 28' Lead & 32' Pull or 32' Lead & 28' Pull
 COUPLER HEIGHT
 Customer Spec. (Min. 46", Max. 52")

WIDTH 102" Overall KING PIN Customer Spec. (Typical 36" on Lead, 24" on Pull); Other options available


GOOSENECK WEB DEPTH Standard 8 ½"; Optional 7 ½"




TRUSTED FOR MILLIONS OF MILES.

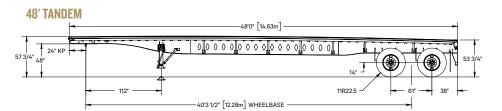


53' TRI-AXLE




53' QUAD STEERABLE ONTARIO SPIF

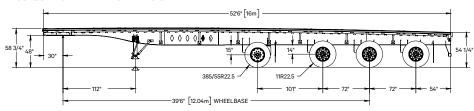


53' WEST COAST QUAD

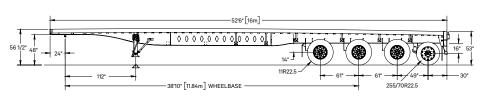


48' TANDEM

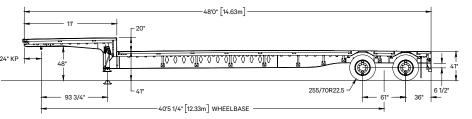


53' TRI-AXLE




53' TRI-AXLE BEAVERTAIL

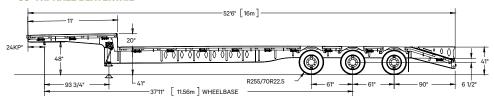


53' QUAD

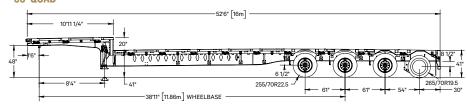

28' LEAD & 32' PULL

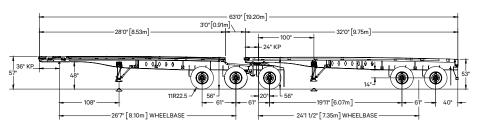

32' LEAD & 28' PULL

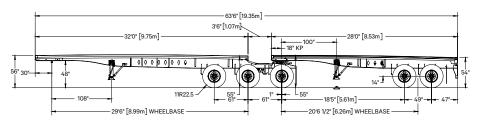



STANDARD FEATURES



AIR GAUGE BOX

The dump valve and air gauge is enclosed in an aluminum box with window.

ALUMINUM AND STEEL BARRIER

Provides a protective layer between the dissimilar metals.

ALUMINUM BOLSTERS

The front bolster includes stake pockets and rub rail. The rear bolster also has integrated stake pockets. Dock bumpers are mounted on the rear corners of the trailer.

CARGO SECUREMENT

The certified cargo securement devices conform to CMVSS 905.

CERTIFIED REAR IMPACT GUARD

Meets or exceeds US DOT and Transport Canada rear impact guard regulations.

OPTIONAL FEATURES



ALUMINUM FILL PLATE

Aluminum fill plate in bumper with Lode King logo.

AXLE CHAIN SLINGS

Prevent air bags and shock absorbers becoming overextended.

BOLT-ON BUMPER

The optional bolt-on rear impact guard meets or exceeds all regulatory requirements of both US DOT and Transport Canada.

CHAIN PULL-OUT

The chain pull-out is located in the outside rail, providing maximum floor space while still allowing access to the chain tie-downs.

COUPLER PLATE

Optional 5/16" or 3/8" plates available. (Optional steel front bolster shown)



HIGH TENSILE STEEL FLANGES

5" wide, 130 KSI grade high-tensile steel is used for both top and bottom flanges.

HUCK BOLTS

Huck bolts are used extensively throughout the trailer.

IN-LINE AIR FILTER

The in-line air filter protects the air system from road debris build-up. The filter is serviceable and replaceable. Extends the duration of the ABS warranty.

LANDING GEAR SUPPORT

Each landing gear leg is braced in multiple directions, providing exceptional stability.

PLUMBING & WIRING

Air and electrical lines from the front of the trailer are routed between the crossmembers and flanges to provide additional protection against damage.



CROSSMEMBER SPACING

Additional crossmembers spaced at 12" OC increase the overall strength of the floor area and increase the rigidity of the trailer.

DISC BRAKES

Hendrickson MAXX22T air disc brakes.

JP SIDE RAIL

Extruded aluminum tubing side rail featuring integrated fixed winches and J-hooks. Also features a recessed rub rail which protects the conspicuity tape and LED lights.



WIDE LOAD LIGHTS

Pull-out wide load LED lights can be extended to various widths and when stored are protected by a fullcircumference shroud. On-off switch located in air gauge box.

STEEL FRONT & REAR BOLSTERS

The front bolster includes stake pockets and rub rail. The rear bolster also has integrated stake pockets. Tail lights are protected inside a full-width recess.

BODY STRUCTURE

BOLSTER - FRONT	Aluminum Extrusion with Four External Mount Stake Pockets; Other Options Available
BOLSTER - REAR	Flatbeds & Drop Decks - Aluminum Extrusion with Four Integral Stake Pockets, Standard B5500 Dock Bumpers; B-Trains - Formed Steel with Four Integral Stake Pockets on Lead; Extruded Aluminum on Pull; Other Options Available
BUMPER	Certified Rear Impact Guard – Meets or Exceeds all Transport Canada and US DOT Regulatory Requirements; Other Options Available
COUPLER PLATE	Standard ¼"; Other Options Available
CROSSMEMBERS	4" Aluminum Extrusion @ 12" OC; Other Options Available
FLANGES	Grade 130 KSI High Tensile Steel, $\%"$ or $\ensuremath{\ensuremath{\%''}}$ × 5" Depending on Application
FLOOR	Standard 15/16" Fir; 15/16" Hardwood or 15/16 Aluminum c/w nailer strips available
KNEE BRACES	Aluminum Tubing @ 48" OC; Other Options Available
LIGHTING	Seven Wire Connector at Front; Truck-Lite LED Lighting Standard; Lifetime Warranty Lamps; Truck-Lite Wiring Harness; Other Options Available
LOAD SECUREMENT	Various Fixed or Sliding Winches, Barrel or Three-Bar Style, J-Hooks, and Others - All Tested to Meet Current Load Securement Regulations
MAIN BEAM PROFILE	Standard Cambered Design; Other Options Available
MUD FLAPS	Heavy Duty, Black Rubber, Anti-Spray, Anti-Sail
OTHER	Conspicuity Treatment - Complies with All Regulatory Requirements
PAINT	Three-Stage Paint Process Consisting of a Coating of Zinc, Urethane Primer and Top Coat
RUB RAIL	Aluminum Extrusion with Recess for Conspicuity Tape
SIDE RAIL	6" Aluminum Extrusion Channel on Platform; 7" on Step Deck; Other Options Available
STAKE POCKETS	Aluminum, External Mount, 48" Spacing, Two Pipe Spools between Pockets; Other Options Available
WEB	Grade 80 KSI High Tensile Steel in High Stress Locations, Grade 50 in Less Critical Areas

RUNNING GEAR

ABS BRAKES	Meritor Wabco, Various Configurations Available, All Meet Transport Canada Regulations
BRAKE DRUMS	Standard Cast, Outboard Mount; Other Options Available
BRAKE LINING	HXS-H23 Extended Service
HUBS	Standard Cast, Hub-Piloted, 10-Stud Unimount, Oil Lubricated; Other Options Available
KING PIN	Holland
LANDING GEAR	Holland Mark V with 2-Speed Gear Drive; Other Options Available
SLACKS	Haldex S-ABA
SUSPENSION & AXLES	Hendrickson INTRAAX; Other Options Available
TIRES	Wide Range of Michelin, BF Goodrich and Bridgestone Products Available
WHEEL SEALS	National
WHEELS	Standard White Steel; Other Options Available

_

WITH YOU FOR THE LONG HAUL.

FOR MORE THAN 40 YEARS,
LODE KING INDUSTRIES HAS
BEEN MANUFACTURING THE
FINEST TRAILERS ON THE ROAD.
FROM GRAIN TRAILERS AND
FLATBEDS TO SPECIALIZEDAPPLICATION TRAILERS,
LODE KING'S ATTENTION TO
QUALITY AND CUSTOMER CARE
SIMPLY CAN'T BE MATCHED.



SOLID FOUNDATION

We've been proud to call Winkler,
Manitoba home since 1980. Lode King
has grown from humble beginnings
to become Western Canada's leading
commercial trailer manufacturer.
We're building on that foundation,
continually growing and innovating as
our products take on new challenges
year after year. Commitment to
these founding principles and our
dedication to future growth underpin
our company's culture and products.



MADE IN CANADA

Lode King understands our country's diverse and sometimes harsh landscape. From the majestic Rockies to the big-sky prairies, we're honoured to be Western Canada's largest commercial trailer manufacturer. Our trailers are built to withstand Canada's ever-changing, severe climates, while our dealer network conveniently spans coast to coast, serving our customers with a wide variety of product options.



CRAFTSMANSHIP

Built tough, our no-compromise quality standards are unmatched in the transport trailer industry. Manufacturing within ISO 9001 international standards, we source and use the best materials available, from initial production steps to final finishing. Our goal is always to build a trailer that's engineered to last, whatever our customers put it through. Every trailer is inspected and certified for quality assurance.



PROUD CUSTOMERS

Lode King trailers are built for drivers who demand more in terms of style, technology, durability and features. Our customers head out on the open road with a sense of pride and have become our ambassadors at large. We never forget that every trailer has our name on it, so we maintain and value the relationships we've formed with fleet operators over the past 40-plus years.



CUTTING EDGE TECHNOLOGY

The latest in automated laser cutting, bending and welding technologies provide the precision and consistency needed to produce top quality components. It's innovative tools like these that help push our products to new heights and make our vision to create the best trailer possible a reality. In our world-class paint facility we also push the boundaries of the transport industry's finishing standards



LONG TERM RELIABILITY

Long term in our industry means more to Lode King than we can possibly convey. Our unwavering quest to produce the highest quality trailers has turned into decades of success for our customers. Knowing our durable trailers will withstand heavy use for years to come helps our customers purchase in total confidence. Our premium quality product means minimal downtime, which leads to more time out on the road, getting the job done.



PROUD, DEDICATED AND LOYAL TEAM

Pride, dedication and loyalty are just part of what drives the team at Lode King Industries. We are committed to maintaining one of the cleanest and safest workspaces around, and place a high level of importance on training and development. This means that our employees are able to develop their skills, which provides both security and opportunities for career development within our growing company.



CUSTOMER SERVICE: A LODE KING PRIORITY

We know exactly how important communication is when you're miles away from home. Technology and customer relations play a large role in how we provide solid service before, during, and after your purchase. As an integrated customer service team working together with our dealer network, we work hand-in-hand with our customers, pro-actively meeting their needs and maintaining the pride they feel in pulling a Lode King trailer.



LODEKING.COM I



BOX 1146, 135 CANADA ST WINKLER, MB, CANADA, R6W 4B2

PHONE 204-325-4345 FAX 204-325-5369

LODEKING.COM

Lode King Industries is a division of Triple E Canada Ltd. Product improvement is an ongoing process at Lode King Industries. Thus we reserve the right to change any specifications or components on any specifications or components on any or all products without prior notice; errors or omissions excepted. Lode-King Industries is under no obligation to undertake modifications to units manufactured prior to changes in specifications. Printed in Canada. 09/21.

